

KAWASAKI VULCAN S '15-

M O U N T I N G I N S T R U C T I O N S

REF 3817

GUARDABARROS DELANTERO / FRONT FENDER



1 Person




20 min



MEDIUM






N° 10
N° 12



ALLEN

N° 3
N° 8
N° 14


ID	PIEZA/PART	DESCRIPCIÓN	DESCRIPTION	QTY	REF
1		Guardabarros delantero	Front Fender	1	3735N
2		Soporte metálico derecho (•)	Right metal suport (•)	1	SOPOR2P3-R-3817
3		Soporte metálico izquierdo (••)	Left metal suport (••)	1	SOPOR2P3-L-3817
4		Tuerca autoblocante M5	M5 lock nut	4	TUERCA-D985-535
5		Tornillo Allen M5x11 Ø11 ISO 7380	M5x11 Ø11 ISO 7380 Allen screw	4	TORNI-AI----520
6		Tapón tornillo Allen M5 ISO 7380	M5 ISO 7380 Allen screw cap	4	TAPON-----85

KAWASAKI VULCAN S '15-

INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

1

**DISASSEMBLY
DESMONTAJE**

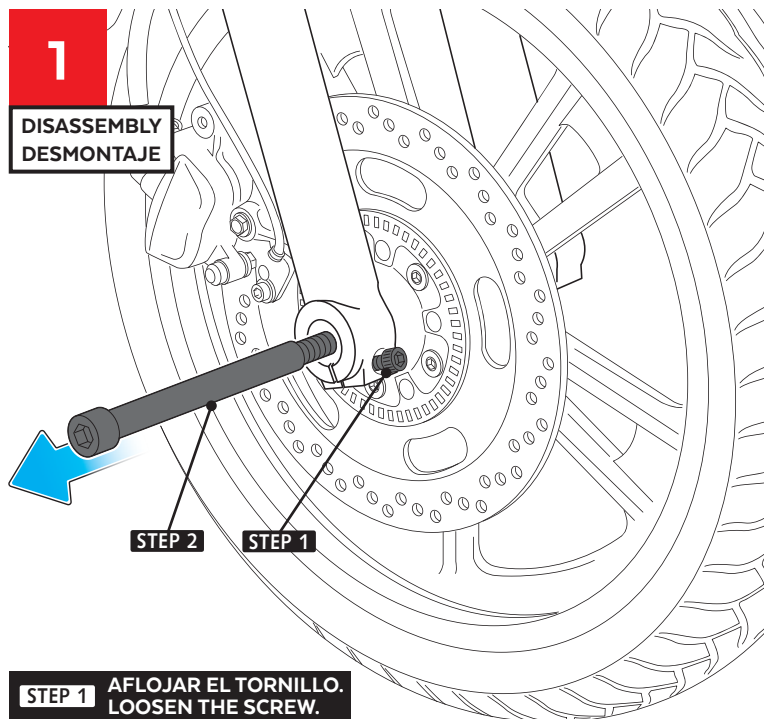


STEP 1 AFLOJAR EL TORNILLO.
LOOSEN THE SCREW.

ELEVAR LA RUEDA DELANTERA PARA EXTRAER EL EJE.
RAISE THE FRONT WHEEL TO REMOVE THE AXLE.


2

**DISASSEMBLY
DESMONTAJE**

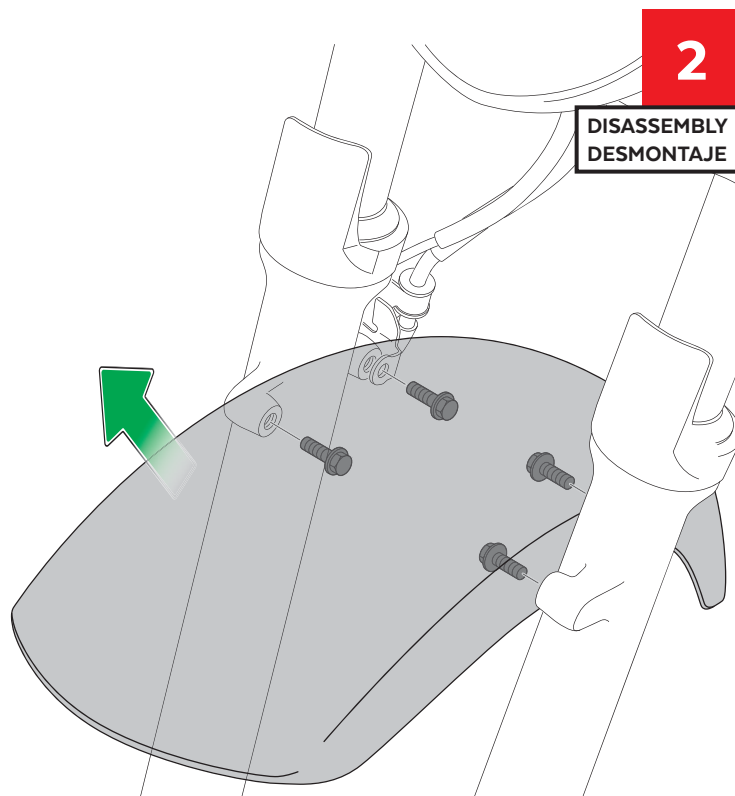

3


**ASSEMBLY
MONTAJE**

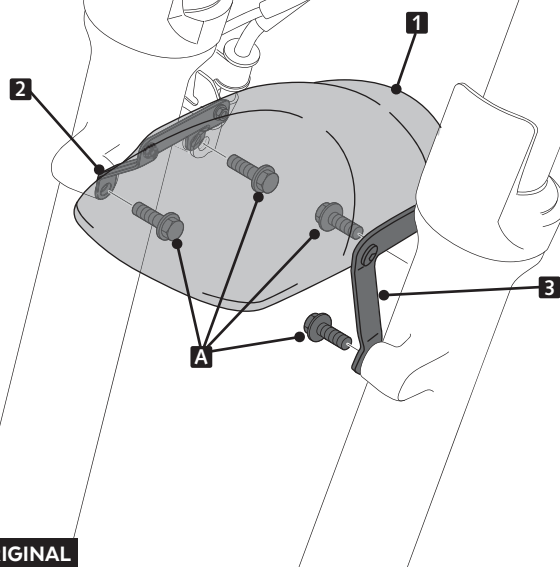

A PIEZA ORIGINAL
ORIGINAL PART

4

**ASSEMBLY
MONTAJE**

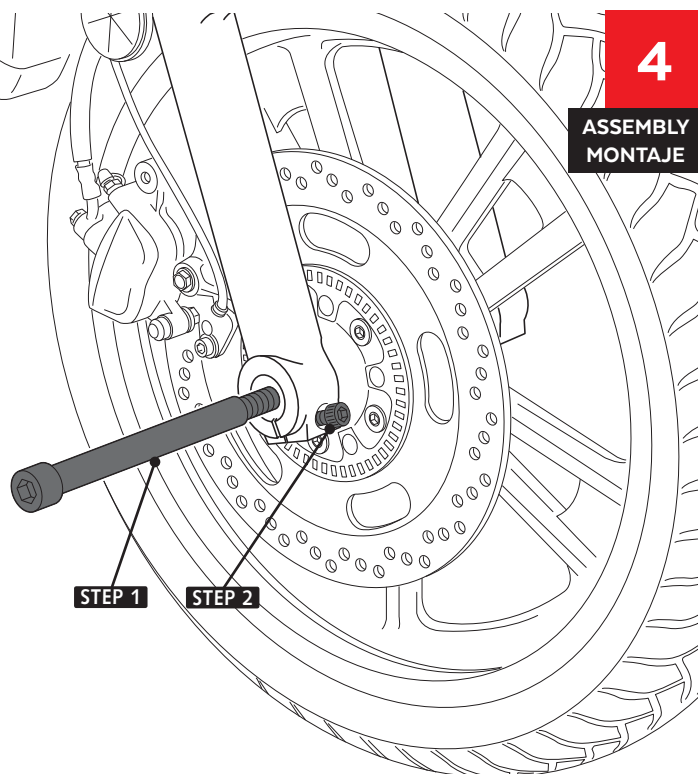

KAWASAKI VULCAN S '15-

EXPLOTING

